



OMPANY INTRODUCTION

dormoster is a hardware's products company with the headquarters located in new delhi, India. We deal in products: Door Closer, Floor Hinge, Patch Fitting, Shower Hinge, Glass Handle, Glass Lock, Spider Fitting, Glass Connector, Glass Profile.

We are accredited with ISO9001-2000, ISO9001-2008, CE Certification. Our Products all subject to 500000 Cycle tested and our main motive is to provide our customers with best quality products, after sales services to our Distributors / agent. We consider the product quality as the foundation and vein of corporate survival and development.

In Dormaster's people opinion, quality inspection of the whole production process. The company requests to keep improving in every step, and work meticulously from market survey to design and development, purchase of raw materials, product manufacture, and inspection of raw material, semifinished product and finished product, and even sales and after-sale service. We request the employees to carefully, elaborately and strictly carry out the inspection regulation and ensure to provide the best product for the society during the production and inspection process.

Products Contents

1	fi-	
١	- 1	
١	- 1	
١	\ \	

DOOR CLOSER

PAGE - 1



FLOOR HINGE

PAGE - 2



PATCH FITTING



SHOWER HINGE



PLASTIC PROFILE

PAGE - 6



SHOWER KNIGHT HEAD ACCESSORIES. PAGE - 7



SLIDING GLASS SYSTEMS

PAGE - 8



SLIDING FOLDING SYSTEMS

PAGE - 9



GLASS DOOR HANDLES



GLASS LOCK

PAGE - 12



AUTOMATIC SLIDING SENSOR DOOR PAGE - 13

Door Closer











DDC - NANO

Specification

- · General design, suitable for left or right hand to open the door in single and both sides.
- · Used low temp. hydraulic oil for any climate operation and constant lubrication.
- Suitable for wooden.
- Suitable for door weight from 25-45kgs.
- Aluminum Alloy
- Color Silver/Brown/Ivory/Black



DDC - CLASSIC

Specification

- · General design, suitable for left or right hand to open the door in single and both sides.
- · Used low temp. hydraulic oil for any climate operation and constant lubrication.
- Suitable for wooden.
- · Suitable for door weight from 45-80kgs.
- Aluminum Alloy
- Color Silver/Brown/Ivory/Black



DDC - GALAXY

Specification

- · General design, suitable for left or right hand to open the door in single and both sides.
- Used low temp. hydraulic oil for any climate operation and constant lubrication.
- Suitable for wooden.
- Suitable for door weight from 45-60kgs.
- Aluminum Alloy
- Color Silver/Brown/Ivory/Black



DDC - PELMET

Specification

- General design, suitable for left or right hand to open the door in single and both sides.
- Used low temp. hydraulic oil for any climate operation and constant lubrication.
- · Suitable for wooden.
- · Suitable for door weight from 45-80kgs.
- Aluminum Alloy
- Color Silver/Brown/Ivory/Black



- General design, suitable for left or right hand to open the door in single and both sides.
- climate operation and constant lubrication.
- Suitable for door weight from 45-80kgs.
- Color Silver/Brown/Ivory/Black



DDC - KING


Specification

- · General design, suitable for left or right hand to open the door in single and both sides.
- · Used low temp. hydraulic oil for any climate operation and constant lubrication.
- Suitable for wooden.
- Suitable for door weight from 45-80kgs.
- Aluminum Alloy
- · Color Silver/Brown/Ivory/Black



Floor Hinge





TESTED TO 500000 CYCLES



DFH 52 SINGLE CYLINDER FLOOR HINGE





Specification

- General design, suitable for left or right hand to open the door in single and both sides.
- Used low temp. hydraulic oil for any climate operation and constant lubrication.
- · Suitable for wooden and toughened glass doors.
- Suitable for door weight from 60-80kgs.
- Closing force 19nm.
- Suitable for maximum wide door leaf (900x2100mm)
- · Opening angle 90 / 115
- · 304 SS Plate



DFH 54 SINGLE CYLINDER

FLOOR HINGE



Specification

- General design, suitable for left or right hand to open the door in single and both sides.
- Used low temp. hydraulic oil for any climate operation and constant lubrication.
- · Suitable for wooden and toughened glass doors.
- · Suitable for door weight from 80-100kgs.
- Closing force 19nm.
- Suitable for maximum wide door leaf (900x2100mm)
- · Opening angle 90 / 115
- 304 SS Plate



DFH 82 E-SERIES

DOUBLE CYLINDER FLOOR HINGE



Specification

- General design, suitable for left or right hand to open the door in single and both sides.
- Used low temp. hydraulic oil for any climate operation and constant lubrication.
- Suitable for wooden and toughened glass doors.
- Suitable for door weight from 100 kgs.
- Closing force 19nm.
- Suitable for maximum wide door leaf (900x2100mm)
- · Opening angle 90 / 115
- 304 SS Plate



DFH 84

DOUBLE CYLINDER FLOOR HINGE





Specification

- General design, suitable for left or right hand to open the door in single and both sides.
- Used low temp. hydraulic oil for any climate operation and constant lubrication.
- · Suitable for wooden and toughened glass doors.
- · Suitable for door weight from 100-150kgs.
- Closing force 19nm.
- Suitable for maximum wide door leaf (900x2100mm)
- · Opening angle 90 / 115
- 304 SS Plate















Patch Fitting









Hydraulic Patch Fitting

Suitable door weight: Max 100kg Suitable door width: 1050mm Suitable door thickness: 8~13mm Quick and easy installation

PATCH FITTING



















DPF-40 CONNECTOR FOR 4 GLASS WITH FIN

DPF-41
OVER PANEL FOR 2 GLASS CONNECTOR



OVER PANEL PATCH





DPF-43
OVER PANEL L PATCH WITH FIN

DPF-43 AOVER PANEL L PATCH WITH FIN



Patch Fitting









DPF- 640 WALL TO GLASS CONNECTING PATCH



DPF- 650
GLASS TO GLASS CONNECTING PATCH



DPF- 6 I DOUBLE OVER PANEL PATCH



DPF- 3 LATCH LOCK



DPF- 3A STRIKE BOX



DPF- 610
OVER PANEL SIDE PATCH
CONNECTOR WITH STOPPER



SMALL PIVOT



DPF- ACC/TB
ACCESSORY FOR FLOOR HINGE



DPF- MFH MINI FLOOR HINGE



DPF- STOPPER GLASS DOOR STOPPER





HIGH GRADE 304 SS PATCH FITTING WITH HIGH QUALITY ALUMINUM ALLOY WITH DECREACES THE CHANCE OF BREAKAGE AND ENHANCES THE GRIPPING OF GLASS

Shower Hinge









SHOWER HINGE



DSH-I H/P

Wall to Glass 90° Off Set Hinge Material: Forged Brass/SS 304/Zinc Door Thickness: 8mm - 12mm Finish: Matt & Chrome Plated



DSH 4

Wall to Glass 90° Hinge Fix



DSH-2

Wall to Glass 90° Off Set Hinge Material: Forged Brass/SS 304/Zinc Door Thickness: 8mm - 12mm Finish: Matt & Chrome Plated



Glass to Glass 135° Hinge



DSH-3

Glass to Glass 90° Off Set Hinge Material: Forged Brass/SS 304/Zinc Door Thickness: 8mm - 12mm Finish: Matt & Chrome Plated



Glass to Glass 180° Hinge



Wall to Glass 90° Off Set Hinge Material: Forged Brass/SS 304/Zinc Door Thickness: 8mm - 12mm Finish: Matt & Chrome Plated



DSH 4A

Wall to Glass 90° Hinge Fix



Wall to Glass 90° Off Set Hinge Material : Forged Brass/SS 304/Zinc Door Thickness: 8mm - 12mm Finish: Matt & Chrome Plated



DSH 5A

Glass to Glass 135° Hinge



Glass to Glass 90° Off Set Hinge Material : Forged Brass/SS 304/Zinc Door Thickness: 8mm - 12mm Finish: Matt & Chrome Plated



DSH 6A

Glass to Glass 180° Hinge



GLASS CONNECTORS



Wall to Glass 90° Door Thickness 8mm to 12mm Finish: Matt & Polish Material 304/202 SS



Door Thickness 8mm to 12mm Finish: Matt & Polish Material 304/202 SS



DGC-3 Glass to Glass 90°

DGC-5

Wall to Glass 180°

Finish: Matt & Polish

Material 304/202 SS



DGC-4

DGC-2

Glass to Glass 135°

Finish : Matt & Polish

Material 304/202 SS

Wall to Glass 135° Door Thickness 8mm to 12mm Finish: Matt & Polish

Door Thickness 8mm to 12mm





Glass to Glass 180° Door Thickness 8mm to 12mm

Finish: Matt & Polish


Material 304/202 SS






Plastic Profile


PLASTIC PROFILE




DPP-01 For: 8/10/12mm Glass




DPP-02 For: 8/10/12mm Glass




DPP-03 For: 8/10/12mm Glass




DPP-04 For: 8/10/12mm Glass



DPP-05 For: 8/10/12mm Glass




DPP-06 For: 8/10/12mm Glass




For: 8/10/12mm Glass




MAGNETIC PROFILE




DMP-01 For: 8/10/12mm Glass



DMP-02 For: 8/10/12mm Glass



DMP-03



DMP-04 For: 8/10/12mm Glass For: 8/10/12mm Glass

Shower Knight Head Accessories.





DKH-11 Wall to Rod (Dia 25mm)



DKH-22 Rod to Glass (Dia 25mm)



DKH-I Wall to Rod (Dia 19mm)



DKH-2 Rod to Glass (Dia 19mm)



DKH-33 Rod to Rod (Dia 25mm)



DKH-44 Rod to Glass (One Side Blind)



DKH-3 Rod to Rod (Dia 19mm)



DKH-4 Rod to Glass (One Side Blind)



DKH-55 Rod to Rod T Connector (Dia 25mm)



DKH-25x25 Connecting Track



DKH-5 Rod to Rod T Connector (Dia 19mm)



DKH-ACC-19 Reinforcing Rod (Dia 19mm)



DOOR KNOBS



DKH-I Door Knob



DKH-2 Door Knob



DKH-3 Door Knob



DKH-4 Door Knob



Sliding Glass Systems



DSL-44-AI (ONE BOX CONTAINS)

- 2 Set Roller (SS)
- 2 Set Stopper
- I Floor Guide



DSL-44-AI (ONE BOX CONTAINS)

- 2 Set Roller (SS)
- 2 Set Stopper
- I Floor Guide



DSL-44-AI (ONE BOX CONTAINS)

- 2 Set Roller (SS)
- 2 Set Stopper
- I Floor Guide



DSL-44-AI (ONE BOX CONTAINS)

- 2 Set Roller (SS)
- 2 Set Stopper
- I Floor Guide



DSL-44-A5 Wall to Track Clamp



DSL-44-A6 Glass to Track Clamp



DSL-HI Sliding Handle (50mm)



DSL-H2 Sliding Handle (50mm)



DSL-H3 Sliding Handle (Rectangle)



DSL-44D Strike Box For Over Lap Glass



DSL-44-LCISliding Door Lock with Strike Box



DSL-44-LC2 Sliding Door Lock with Strike Plate





Sliding Folding Systems





DFS-01 Fixed Hinge



DFS-02 Glass to Glass Hinge



DFS-03 Hinge with Roller



DFS-04 Eng Hinge with Roller



DFS-05 Floor Fixed Hinge



DFS-06 Glass to Glass Hinge with Lock









DFS-08 End Hinge with Guide



DFS-09 Wall to Glass Hinge



DFS-10 Floor Track Bottom (S.S)




DFS-II Aluminium Top Track



Glass Door Handles



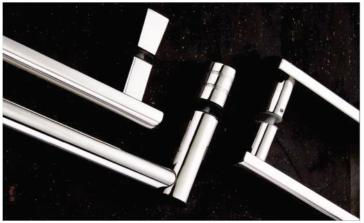

dorm



DGH-012 MATERIAL - SS FINISH - MATT / CP



DGH-014 MATERIAL - SS FINISH - MATT / CP



DGH-022 MATERIAL - SS FINISH - MATT / CP



DGH-025 MATERIAL - SS FINISH - MATT / CP



DGH-042 MATERIAL - SS FINISH - MATT / CP



DGH-047 MATERIAL - SS FINISH - MATT / CP



DGH-062 MATERIAL - SS FINISH - MATT / CP



DGH-120 MATERIAL - SS FINISH - MATT / CP

Glass Door Handles





DGH-095 MATERIAL - SS FINISH - MATT / CP



DGH-098 MATERIAL - SS FINISH - MATT / CP



DGH-099 MATERIAL - SS FINISH - MATT / CP



DGH-106 MATERIAL - SS FINISH - MATT / CP



DGH-105 MATERIAL - SS FINISH - MATT / CP



DGH-109 MATERIAL - SS FINISH - MATT / CP



DGH-113 FINISH - MATT / CP



DGH-123 MATERIAL - SS FINISH - MATT / CP
















Glass Lock & Spider Fitting

GLASS LOCK WITHOUT CUTOUT



DGL-01 Glass to Glass Lock Single side



DGL-02 Glass to Glass Lock Double side



DGL-03 Wall to Glass Lock



DGL-04 Glass to Glass Lock Single side



DGL-05 Glass to Glass Lock Double side



DGL-06 Wall to Glass Lock



DGL-07 Glass to Glass Lock



DGL-08 (Mini) Glass to Glass Lock Double side




DGL-09 Mortice Glass Lock



SPIDER FITTING






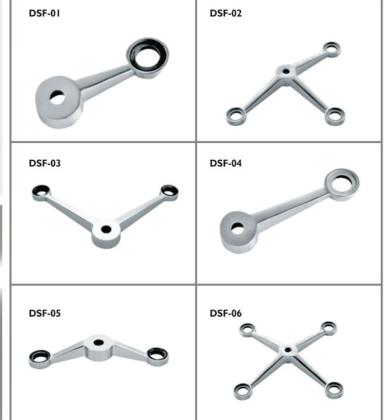

Automatic Sliding Sensor Door



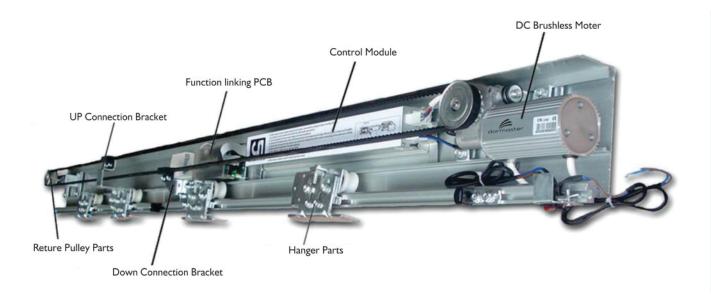



Specification

Door Parameter			
Single Leaf Maximum Opening	1200mm x 2400mm		
Bi-parting Door Maximum Opening	2200mm x 2400mm		
Maximum Door Weight Single Leaf	75kg to 90kg (Single Door)		
Maximum Door Weight Double Leaf	75kg x 2 Door (Bi-parting)		



ТҮРЕ	SASD-I	
Opening Speed	Adjust Between 250-600mm/Sec.	
Closing Speed	Adjust Between 150-300mm/Sec.	
Holding Time	1-15 Sec.	
Pushing Force	<37N <45N	
Power	Ac 200-250V	
Voltage	DC 24V-50W	
Environment Temperature	-200C - +500C	

- Features and advantages
 Intelligent control system.
 Drive equipment with low noise.
- Advanced brushless motor and worm wheel reducer are integrated.
- Special self-locking function without any addition components.
 With different triggered opening modes.
 Double door interlock function.

- Optional power supply backup to ensure the normal operation.
 When door is closed, it shall be locked and kept closed.
 Apply to doors for garage, usage of anti-radiantion for hospitals, warehouses, science and technology factories, barrier-free space, commercial building, shopping mall, etc.

 Easy installation & low maintenance.

 Track size: 4200mm/6400mm.












dormaster




























ARCHITECTURAL HARDWARE